

## 2 Flutes UNIMAX DRILL



Size  $\phi 0.1 \sim \phi 3$


# C-UMD




Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																		
Carbon Steels S45C S55C	Alloy Steels SK / SCM SUS	Prehardened Steels NAK HPM	Hardened Steels					Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials	
			~50HRC	~55HRC	~60HRC	~65HRC	~70HRC											
●	●	○	Contact sales when drilling over 45HRC.					○	●		○				○	○		


■  $\phi 0.1 \sim \phi 0.25$



■  $\phi 0.26 \sim \phi 0.65$



■  $\phi 0.66 \sim \phi 3$



Actual tool geometries for some specifications and tolerances may differ from above drawings.  $\phi 3$  is Straight type.

Diameter Tolerance :  $\phi D \leq \phi 3$  :  $\phi D -0.01$   
Point Angle :  $150^\circ$

Total 225 models

Unit (mm)

Unit (mm)

Model Number	Diameter $\phi D$	Flute Length $\ell$	Overall Length L	Shank Diameter $\phi d$	Suggested Retail Price ¥
C-UMD 2010-012	0.1	1.2	38	3	5,500
C-UMD 2011-012	0.11	1.2	38	3	6,050
C-UMD 2012-014	0.12	1.4	38	3	6,050
C-UMD 2013-014	0.13	1.4	38	3	6,050
C-UMD 2014-014	0.14	1.4	38	3	6,050
C-UMD 2015-020	0.15	2	38	3	5,060
C-UMD 2016-020	0.16	2	38	3	5,390
C-UMD 2017-020	0.17	2	38	3	5,390
C-UMD 2018-020	0.18	2	38	3	5,390
C-UMD 2019-020	0.19	2	38	3	5,390
C-UMD 2020-025	0.2	2.5	38	3	4,400
C-UMD 2021-025	0.21	2.5	38	3	4,950
C-UMD 2022-025	0.22	2.5	38	3	4,950
C-UMD 2023-025	0.23	2.5	38	3	4,950
C-UMD 2024-025	0.24	2.5	38	3	4,950
C-UMD 2025-030	0.25	3	38	3	4,950
C-UMD 2026-030	0.26	3	38	3	4,730
C-UMD 2027-030	0.27	3	38	3	4,730
C-UMD 2028-030	0.28	3	38	3	4,730
C-UMD 2029-030	0.29	3	38	3	4,730
C-UMD 2030-050	0.3	5	38	3	3,850
C-UMD 2031-050	0.31	5	38	3	4,730
C-UMD 2032-050	0.32	5	38	3	4,730
C-UMD 2033-050	0.33	5	38	3	4,730

Model Number	Diameter $\phi D$	Flute Length $\ell$	Overall Length L	Shank Diameter $\phi d$	Suggested Retail Price ¥
C-UMD 2034-050	0.34	5	38	3	4,730
C-UMD 2035-060	0.35	6	38	3	4,290
C-UMD 2036-060	0.36	6	38	3	4,730
C-UMD 2037-060	0.37	6	38	3	4,730
C-UMD 2038-060	0.38	6	38	3	4,730
C-UMD 2039-060	0.39	6	38	3	4,730
C-UMD 2040-070	0.4	7	38	3	3,850
C-UMD 2041-070	0.41	7	38	3	4,730
C-UMD 2042-070	0.42	7	38	3	4,730
C-UMD 2043-070	0.43	7	38	3	4,730
C-UMD 2044-070	0.44	7	38	3	4,730
C-UMD 2045-070	0.45	7	38	3	4,290
C-UMD 2046-070	0.46	7	38	3	4,730
C-UMD 2047-070	0.47	7	38	3	4,730
C-UMD 2048-070	0.48	7	38	3	4,730
C-UMD 2049-070	0.49	7	38	3	4,730
C-UMD 2050-070	0.5	7	38	3	4,290
C-UMD 2051-070	0.51	7	38	3	4,290
C-UMD 2052-070	0.52	7	38	3	4,290
C-UMD 2053-070	0.53	7	38	3	4,290
C-UMD 2054-070	0.54	7	38	3	4,290
C-UMD 2055-070	0.55	7	38	3	3,410
C-UMD 2056-070	0.56	7	38	3	4,290
C-UMD 2057-070	0.57	7	38	3	4,290

Next Page →

Unit (mm)

Model Number	Diameter $\phi D$	Flute Length $l$	Overall Length L	Shank Diameter $\phi d$	Suggested Retail Price ¥
C-UMD 2058-070	0.58	7	38	3	4,290
C-UMD 2059-070	0.59	7	38	3	4,290
C-UMD 2060-070	0.6	7	38	3	2,970
C-UMD 2061-070	0.61	7	38	3	4,290
C-UMD 2062-070	0.62	7	38	3	4,290
C-UMD 2063-070	0.63	7	38	3	4,290
C-UMD 2064-070	0.64	7	38	3	4,290
C-UMD 2065-070	0.65	7	38	3	3,410
C-UMD 2066-070	0.66	7	38	3	4,290
C-UMD 2067-070	0.67	7	38	3	4,290
C-UMD 2068-070	0.68	7	38	3	4,290
C-UMD 2069-070	0.69	7	38	3	4,290
C-UMD 2070-080	0.7	8	38	3	2,970
C-UMD 2071-080	0.71	8	38	3	4,290
C-UMD 2072-080	0.72	8	38	3	4,290
C-UMD 2073-080	0.73	8	38	3	4,290
C-UMD 2074-080	0.74	8	38	3	4,290
C-UMD 2075-080	0.75	8	38	3	3,410
C-UMD 2076-080	0.76	8	38	3	4,290
C-UMD 2077-080	0.77	8	38	3	4,290
C-UMD 2078-080	0.78	8	38	3	4,290
C-UMD 2079-080	0.79	8	38	3	4,290
C-UMD 2080-100	0.8	10	38	3	2,970
C-UMD 2081-100	0.81	10	38	3	4,290
C-UMD 2082-100	0.82	10	38	3	4,290
C-UMD 2083-100	0.83	10	38	3	4,290
C-UMD 2084-100	0.84	10	38	3	4,290
C-UMD 2085-100	0.85	10	38	3	3,410
C-UMD 2086-100	0.86	10	38	3	4,290
C-UMD 2087-100	0.87	10	38	3	4,290
C-UMD 2088-100	0.88	10	38	3	4,290
C-UMD 2089-100	0.89	10	38	3	4,290
C-UMD 2090-100	0.9	10	38	3	2,970
C-UMD 2091-100	0.91	10	38	3	4,290
C-UMD 2092-100	0.92	10	38	3	4,290
C-UMD 2093-100	0.93	10	38	3	4,290
C-UMD 2094-100	0.94	10	38	3	4,290
C-UMD 2095-100	0.95	10	38	3	3,410
C-UMD 2096-100	0.96	10	38	3	4,290
C-UMD 2097-100	0.97	10	38	3	4,290
C-UMD 2098-100	0.98	10	38	3	4,290
C-UMD 2099-100	0.99	10	38	3	4,290
C-UMD 2100-100	1	10	38	3	2,750
C-UMD 2101-100	1.01	10	38	3	3,410
C-UMD 2102-100	1.02	10	38	3	3,410
C-UMD 2103-100	1.03	10	38	3	3,410

Unit (mm)

Model Number	Diameter $\phi D$	Flute Length $l$	Overall Length L	Shank Diameter $\phi d$	Suggested Retail Price ¥
C-UMD 2104-100	1.04	10	38	3	3,410
C-UMD 2105-100	1.05	10	38	3	2,750
C-UMD 2106-100	1.06	10	38	3	3,410
C-UMD 2107-100	1.07	10	38	3	3,410
C-UMD 2108-100	1.08	10	38	3	3,410
C-UMD 2109-100	1.09	10	38	3	3,410
C-UMD 2110-100	1.1	10	38	3	2,750
C-UMD 2111-100	1.11	10	38	3	3,410
C-UMD 2112-100	1.12	10	38	3	3,410
C-UMD 2113-100	1.13	10	38	3	3,410
C-UMD 2114-100	1.14	10	38	3	3,410
C-UMD 2115-100	1.15	10	38	3	2,750
C-UMD 2116-100	1.16	10	38	3	3,410
C-UMD 2117-100	1.17	10	38	3	3,410
C-UMD 2118-100	1.18	10	38	3	3,410
C-UMD 2119-100	1.19	10	38	3	3,410
C-UMD 2120-100	1.2	10	38	3	2,750
C-UMD 2121-100	1.21	10	38	3	3,410
C-UMD 2122-100	1.22	10	38	3	3,410
C-UMD 2123-100	1.23	10	38	3	3,410
C-UMD 2124-100	1.24	10	38	3	3,410
C-UMD 2125-100	1.25	10	38	3	2,750
C-UMD 2126-100	1.26	10	38	3	3,410
C-UMD 2127-100	1.27	10	38	3	3,410
C-UMD 2128-100	1.28	10	38	3	3,410
C-UMD 2129-100	1.29	10	38	3	3,410
C-UMD 2130-100	1.3	10	38	3	2,750
C-UMD 2131-100	1.31	10	38	3	3,410
C-UMD 2132-100	1.32	10	38	3	3,410
C-UMD 2133-100	1.33	10	38	3	3,410
C-UMD 2134-100	1.34	10	38	3	3,410
C-UMD 2135-100	1.35	10	38	3	2,750
C-UMD 2136-100	1.36	10	38	3	3,410
C-UMD 2137-100	1.37	10	38	3	3,410
C-UMD 2138-100	1.38	10	38	3	3,410
C-UMD 2139-100	1.39	10	38	3	3,410
C-UMD 2140-100	1.4	10	38	3	2,750
C-UMD 2141-100	1.41	10	38	3	3,410
C-UMD 2142-100	1.42	10	38	3	3,410
C-UMD 2143-100	1.43	10	38	3	3,410
C-UMD 2144-100	1.44	10	38	3	3,410
C-UMD 2145-100	1.45	10	38	3	2,750
C-UMD 2146-100	1.46	10	38	3	3,410
C-UMD 2147-100	1.47	10	38	3	3,410
C-UMD 2148-100	1.48	10	38	3	3,410
C-UMD 2149-100	1.49	10	38	3	3,410

$\phi 3mm$  Shank  
V Series

UDC-PCD  
Series

CBN  
Series

Square  
Long Neck  
Square

Radius

Long Neck  
Radius

Taper Neck  
Radius

Ball / Long  
Shank Ball

Long Neck  
Ball

Taper Neck  
Ball

Taper

Barrel

Spiral  
V Cutter

Drill

Technical Data

Next Page →


## 2 Flutes UNIMAX DRILL

Unit (mm)

Model Number	Diameter $\phi D$	Flute Length $\ell$	Overall Length L	Shank Diameter $\phi d$	Suggested Retail Price ¥
C-UMD 2150-100	1.5	10	38	3	2,750
C-UMD 2151-100	1.51	10	38	3	3,410
C-UMD 2152-100	1.52	10	38	3	3,410
C-UMD 2153-100	1.53	10	38	3	3,410
C-UMD 2154-100	1.54	10	38	3	3,410
C-UMD 2155-100	1.55	10	38	3	2,750
C-UMD 2156-100	1.56	10	38	3	3,410
C-UMD 2157-100	1.57	10	38	3	3,410
C-UMD 2158-100	1.58	10	38	3	3,410
C-UMD 2159-100	1.59	10	38	3	3,410
C-UMD 2160-120	1.6	12	38	3	2,750
C-UMD 2161-120	1.61	12	38	3	3,630
C-UMD 2162-120	1.62	12	38	3	3,630
C-UMD 2163-120	1.63	12	38	3	3,630
C-UMD 2164-120	1.64	12	38	3	3,630
C-UMD 2165-120	1.65	12	38	3	2,970
C-UMD 2166-120	1.66	12	38	3	3,630
C-UMD 2167-120	1.67	12	38	3	3,630
C-UMD 2168-120	1.68	12	38	3	3,630
C-UMD 2169-120	1.69	12	38	3	3,630
C-UMD 2170-120	1.7	12	38	3	2,970
C-UMD 2171-120	1.71	12	38	3	3,630
C-UMD 2172-120	1.72	12	38	3	3,630
C-UMD 2173-120	1.73	12	38	3	3,630
C-UMD 2174-120	1.74	12	38	3	3,630
C-UMD 2175-120	1.75	12	38	3	2,970
C-UMD 2176-120	1.76	12	38	3	3,630
C-UMD 2177-120	1.77	12	38	3	3,630
C-UMD 2178-120	1.78	12	38	3	3,630
C-UMD 2179-120	1.79	12	38	3	3,630
C-UMD 2180-120	1.8	12	38	3	2,970
C-UMD 2181-120	1.81	12	38	3	3,630
C-UMD 2182-120	1.82	12	38	3	3,630
C-UMD 2183-120	1.83	12	38	3	3,630
C-UMD 2184-120	1.84	12	38	3	3,630
C-UMD 2185-120	1.85	12	38	3	2,970
C-UMD 2186-120	1.86	12	38	3	3,630
C-UMD 2187-120	1.87	12	38	3	3,630
C-UMD 2188-120	1.88	12	38	3	3,630
C-UMD 2189-120	1.89	12	38	3	3,630
C-UMD 2190-120	1.9	12	38	3	2,970
C-UMD 2191-120	1.91	12	38	3	3,630
C-UMD 2192-120	1.92	12	38	3	3,630

Unit (mm)

Model Number	Diameter $\phi D$	Flute Length $\ell$	Overall Length L	Shank Diameter $\phi d$	Suggested Retail Price ¥
C-UMD 2193-120	1.93	12	38	3	3,630
C-UMD 2194-120	1.94	12	38	3	3,630
C-UMD 2195-120	1.95	12	38	3	2,970
C-UMD 2196-120	1.96	12	38	3	3,630
C-UMD 2197-120	1.97	12	38	3	3,630
C-UMD 2198-120	1.98	12	38	3	3,630
C-UMD 2199-120	1.99	12	38	3	3,630
C-UMD 2200-120	2	12	38	3	2,970
C-UMD 2205-120	2.05	12	38	3	3,850
C-UMD 2210-120	2.1	12	38	3	3,190
C-UMD 2212-120	2.12	12	38	3	3,190
C-UMD 2213-120	2.13	12	38	3	3,190
C-UMD 2214-120	2.14	12	38	3	3,190
C-UMD 2215-120	2.15	12	38	3	3,850
C-UMD 2220-120	2.2	12	38	3	3,190
C-UMD 2225-120	2.25	12	38	3	3,850
C-UMD 2229-120	2.29	12	38	3	3,190
C-UMD 2230-120	2.3	12	38	3	3,190
C-UMD 2231-120	2.31	12	38	3	3,190
C-UMD 2232-120	2.32	12	38	3	3,190
C-UMD 2235-120	2.35	12	38	3	3,850
C-UMD 2239-120	2.39	12	38	3	3,190
C-UMD 2240-120	2.4	12	38	3	3,190
C-UMD 2241-120	2.41	12	38	3	3,190
C-UMD 2242-120	2.42	12	38	3	3,190
C-UMD 2245-120	2.45	12	38	3	3,850
C-UMD 2250-120	2.5	12	38	3	3,190
C-UMD 2255-120	2.55	12	38	3	3,850
C-UMD 2256-120	2.56	12	38	3	3,190
C-UMD 2257-120	2.57	12	38	3	3,190
C-UMD 2260-120	2.6	12	38	3	3,190
C-UMD 2265-120	2.65	12	38	3	3,850
C-UMD 2270-120	2.7	12	38	3	3,190
C-UMD 2275-120	2.75	12	38	3	3,850
C-UMD 2277-120	2.77	12	38	3	3,190
C-UMD 2278-120	2.78	12	38	3	3,190
C-UMD 2279-120	2.79	12	38	3	3,190
C-UMD 2280-120	2.8	12	38	3	3,190
C-UMD 2285-120	2.85	12	38	3	3,850
C-UMD 2290-120	2.9	12	38	3	3,190
C-UMD 2295-120	2.95	12	38	3	3,850
C-UMD 2300-120	3	12	38	3	3,190



## Drilling Conditions for C-UMD

WORK MATERIAL	CARBON STEELS S45C / S50C (~225HB)		ALLOY STEELS SK / SCM / SUS (225~325HB)		PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)		ALUMINUM ALLOYS A5052 etc.	
Velocity	Vc=25~40 m/min		Vc=15~25 m/min		Vc=10~15 m/min		Vc=20~60 m/min	
Diameter (mm)	Spindle Speed (min <sup>-1</sup> )	Feed Rate (mm/min)	Spindle Speed (min <sup>-1</sup> )	Feed Rate (mm/min)	Spindle Speed (min <sup>-1</sup> )	Feed Rate (mm/min)	Spindle Speed (min <sup>-1</sup> )	Feed Rate (mm/min)
<b>0.3</b>	20,000	40	15,900	30	10,600	10	20,000	400
<b>0.4</b>	17,400	50	11,800	40	8,000	20	19,900	690
<b>0.5</b>	15,900	80	9,500	50	6,400	30	20,000	1,000
<b>0.6</b>	14,100	80	7,900	40	5,300	20	19,900	1,050
<b>0.7</b>	12,800	90	6,800	50	4,500	20	19,900	1,120
<b>0.8</b>	11,900	100	6,000	50	4,000	20	19,900	1,190
<b>0.9</b>	10,500	100	6,200	50	3,500	20	17,600	1,220
<b>1</b>	9,500	100	6,400	60	3,200	20	15,900	1,270
<b>2</b>	5,600	170	3,200	100	1,600	20	9,500	950
<b>3</b>	3,700	150	2,700	110	1,600	20	6,400	640

### Note:

- Recommend step amount 0.1D-0.2D. Recommend 0.2D-0.5D for Aluminum Alloys.
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

φ3mm Shank  
V Series

UDC-PCD  
Series

CBN  
Series

Square

Long Neck  
Square

Radius

Radius

Long Neck  
Radius

Taper Neck  
Radius

Ball / Long  
Shank Ball

Ball

Long Neck  
Ball

Taper Neck  
Ball

Taper

Barrel

Spiral  
V Cutter

Drill

Technical Data

Drilling Example 1

SUS304

■ Comments

● Tip Damage:

Damage by chipping can be seen on the Carbide Drill. The High-Speed Steel Drill exhibits wear on the top chisel line and corners. The High-Speed Steel Drill also has the work material adhering to it.

● Hole Position:


The solid carbide drill has minimal deflection when compared to a High Speed steel model, through the entire drilling cycle.

■ Drilling Condition


Tool:	$\phi$ 0.6 × Flute Length 7mm
Work Material:	SUS304 (1.4301)
Spindle Speed:	8,000 min <sup>-1</sup>
Velocity:	15 m/min
Z Feed Rate:	50 mm/min
Chip Load:	0.00625 mm/rev
Peck Amount:	0.12 mm/time
Hole Depth:	2.4 mm
Number of Holes:	500 holes
Drilling Time :	25 min/100 holes
Overhang Length :	10 mm
Coolant:	Water Soluble (Nozzle)

Process Form

\* Blind Hole Step Process

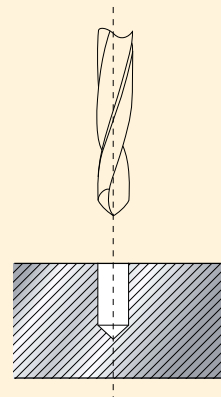


■ Comparison of Tip Damage

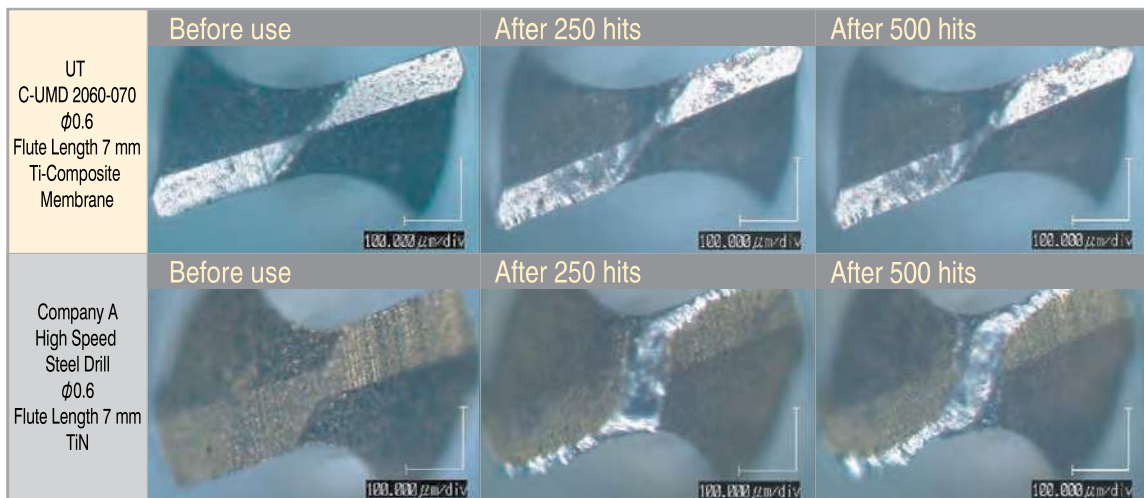


- φ3mm Shark V Series
- UDC-PCD Series
- CBN Series
- Square
- Long Neck Square
- Radius
- Long Neck Radius
- Taper Neck Radius
- Ball / Long Shank Ball
- Long Neck Ball
- Taper Neck Ball
- Taper
- Barrel
- Spiral V Cutter
- Drill
- Technical Data

**Comparison of Hole Position**

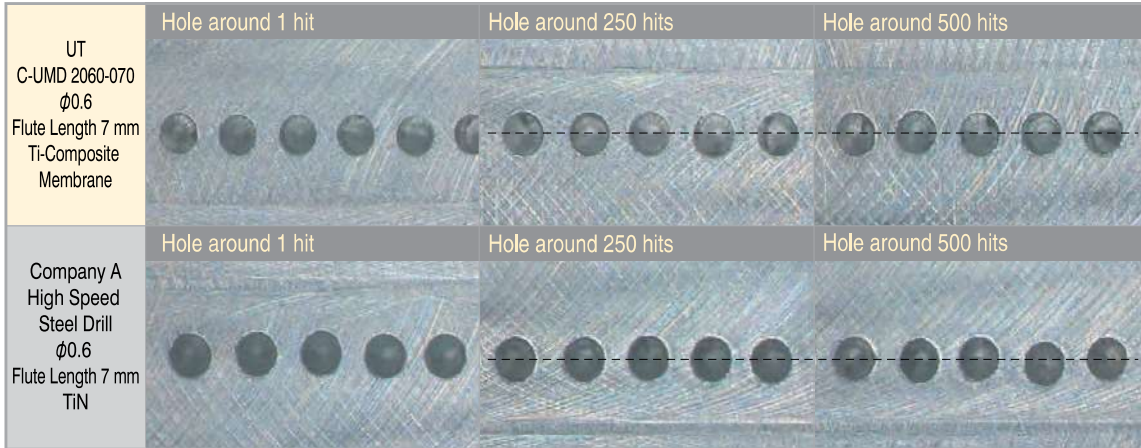

**Drilling Example 2**

**SUS304**  
φ0.1 Drilling (about 800 holes)

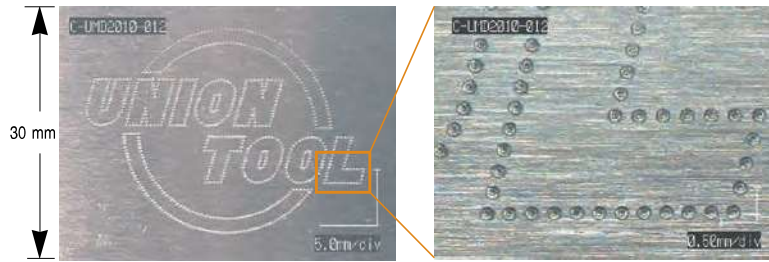

	Spindle Speed (min <sup>-1</sup> )	Feed Rate (mm/min)	Peck Amount (mm/time)	Hole Depth (mm)	Drilling Time	Coolant	Note
<b>Acrylic φ0.1</b>							
C-UMD φ 0.1	20,000	20	0.02	1.00	1 h 30 min	Air Blow	Without pilot hole drilling
<b>SUS304 (1.4301) φ0.1</b>							
Center Drill+Chamfering C-UMD φ 0.2	10,000	2	0.01	0.05	2 h 50 min	Water Soluble	
Drilling C-UMD φ 0.1	12,000	4	0.02	0.20	3 h 27 min	Water Soluble	
<b>Aluminum (A5052) φ0.2</b>							
C-UMD φ 0.2	16,000	80	0.04	1.50	2 h 50 min	Water Soluble	Using back-up board
<b>NAK55 (AISI P21) φ0.3</b>							
C-UMD φ 0.3	15,000	15	0.06	1.50	3 h 35 min	Water Soluble	With pilot hole drilling
<b>SUS304 (1.4301) φ0.3</b>							
C-UMD φ 0.3	16,000	30	0.06	1.50	2 h 24 min	Water Soluble	With pilot hole drilling

- φ3mm Shank V Series
- UDC-PCD Series
- CBN Series
- Square
- Long Neck Square
- Radius
- Long Neck Radius
- Taper Neck Radius
- Ball / Long Shank Ball
- Ball
- Long Neck Ball
- Taper Neck Ball
- Taper
- Barrel
- Spiral V Cutter
- Drill
- Technical Data