

2 Flutes NON-COAT for Plastic Milling



Size **R0.2~R3**

CPRB




Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material																	
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels					Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
S45C	SK / SCM	NAK HPM	~50HRC	~55HRC	~60HRC	~65HRC	~70HRC										
									○		●	★					

Features

Long neck ball design for milling Plastics.
Designed especially for deep rib milling using an undercut form.

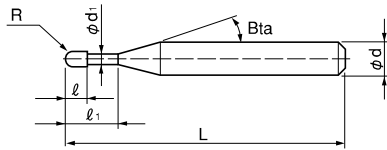

The shank taper angle shown is not an exact value and to avoid contact with the work piece, we recommend the user controls the precise value of this angle. Shank taper angle should not make contact with the work piece.

Total 80 models

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle Bta	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CPRB 2004-1	R0.2	1	0.4	0.36	11°	45	4	8,000
CPRB 2004-2		2						8,800
CPRB 2004-3		3						9,800
CPRB 2005-2	R0.25	2	0.8	0.46	11°	45	4	8,000
CPRB 2005-4		4						8,000
CPRB 2005-6		6						8,800
CPRB 2005-8		8						8,800
CPRB 2005-10		10						9,500
CPRB 2006-2	R0.3	2	1	0.56	11°	45	4	7,200
CPRB 2006-4		4						7,200
CPRB 2006-6		6						7,200
CPRB 2006-8		8						7,200
CPRB 2008-2	R0.4	2	1.1	0.76	11°	45	4	7,080
CPRB 2008-4		4						7,080
CPRB 2008-6		6						7,080
CPRB 2008-8		8						7,080
CPRB 2008-10		10						7,080

- φ3mm Shank V Series
- UDC-PCD Series
- CBN Series
- Square
- Long Neck Square
- Radius
- Long Neck Radius
- Taper Neck Radius
- Ball / Long Shank Ball
- Long Neck Ball
- Taper Neck Ball
- Taper
- Barrel
- Spiral V Cutter
- Drill
- Technical Data

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length l_1	Length of Cut l	Neck Diameter ϕd_1	Shank Taper Angle β	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CPRB 2010-3	R0.5	3	1.2	0.93	11°	45	4	6,120
CPRB 2010-4		4				45	4	6,120
CPRB 2010-6		6				45	4	6,120
CPRB 2010-8		8				45	4	6,120
CPRB 2010-10		10				45	4	6,120
CPRB 2010-12		12				45	4	6,120
CPRB 2010-14		14				50	4	6,120
CPRB 2010-16		16				50	4	6,120
CPRB 2010-20		20				55	4	7,200
CPRB 2012-8		R0.6				8	1.3	1.13
CPRB 2012-12	12		45	4	8,000			
CPRB 2014-8	R0.7	8	1.4	1.33	11°	45	4	8,000
CPRB 2014-12		12				45	4	8,000
CPRB 2014-16		16				50	4	8,000
CPRB 2015-6	R0.75	6	1.45	1.43	11°	45	4	6,240
CPRB 2015-8		8				45	4	6,240
CPRB 2015-10		10				45	4	6,240
CPRB 2015-12		12				45	4	6,240
CPRB 2015-16		16				50	4	6,240
CPRB 2015-20		20				55	4	6,240
CPRB 2016-8		R0.8				8	1.5	1.5
CPRB 2016-12	12		45	4	8,000			
CPRB 2016-16	16		50	4	8,000			
CPRB 2016-20	20		55	4	8,000			
CPRB 2018-8	R0.9	8	1.6	1.7	11°	45	4	8,000
CPRB 2018-12		12				45	4	8,000
CPRB 2018-16		16				50	4	8,000
CPRB 2018-20		20				55	4	8,000
CPRB 2020-4		R1				4	1.7	1.9
CPRB 2020-6	6		45	4	6,120			
CPRB 2020-8	8		45	4	6,120			
CPRB 2020-10	10		45	4	6,120			
CPRB 2020-12	12		45	4	6,120			
CPRB 2020-14	14		50	4	6,120			
CPRB 2020-16	16		50	4	6,120			
CPRB 2020-20	20		55	4	6,120			
CPRB 2020-22	22		60	4	6,120			
CPRB 2020-25	25		65	4	6,120			
CPRB 2020-30	30		70	4	7,440			

φ3mm Shank
V SeriesUDC-PCD
SeriesCBN
SeriesSquare
Long Neck
Square

Radius

Long Neck
RadiusTaper Neck
RadiusBall / Long
Shank BallLong Neck
BallTaper Neck
Ball

Taper

Barrel

Spiral
V Cutter

Drill

Technical Data

Next Page →

2 Flutes NON-COAT for Plastic Milling

Unit (mm)

Model Number	Radius of Ball Nose R	Effective Length ℓ_1	Length of Cut ℓ	Neck Diameter ϕd_1	Shank Taper Angle B α	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
CPRB 2030-8	R1.5	8	2.5	2.9	11°	60	6	8,640
CPRB 2030-10		10				60		8,640
CPRB 2030-12		12				60		8,640
CPRB 2030-16		16				60		8,640
CPRB 2030-20		20				70		8,640
CPRB 2030-25		25				70		8,640
CPRB 2030-30		30				70		8,640
CPRB 2030-35		35				80		10,080
CPRB 2040-10	R2	10	3	3.8	11°	70	6	8,640
CPRB 2040-12		12				70		8,640
CPRB 2040-16		16				70		8,640
CPRB 2040-20		20				70		8,640
CPRB 2040-25		25				70		8,640
CPRB 2040-30		30				70		8,640
CPRB 2040-35		35				80		8,880
CPRB 2040-40		40				90		9,120
CPRB 2040-45		45				90		10,320
CPRB 2040-50		50				100		11,280
CPRB 2050-20	R2.5	20	3.5	4.8	11°	70	6	12,080
CPRB 2050-25		25				70		12,080
CPRB 2050-30		30				80		13,130
CPRB 2050-35		35				80		13,130
CPRB 2060-30	R3	30	6	5.8	—	80	6	10,080
CPRB 2060-50		50			—	120		12,180

φ3mm Shank V Series

UDC-PCD Series

CBN Series

Square
Long Neck Square

Radius

Long Neck Radius
Taper Neck Radius

Ball / Long Shank Ball

Long Neck Ball

Taper Neck Ball

Taper

Barrel

Spiral V Cutter


Drill

Technical Data

Milling Conditions for CPRB

WORK MATERIAL		ALUMINUM ALLOYS			PLASTICS		
Model Number	Radius of Ball Nose (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a_p Axial Depth (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a_p Axial Depth (mm)
2004	R0.2	35,000	560	0.005~0.01	35,000	1,100	0.07~0.2
2005	R0.25	35,000	700	0.003~0.01	28,000	1,200	0.08~0.25
2006	R0.3	35,000	910	0.006~0.03	24,000	1,200	0.1 ~0.3
2008	R0.4	26,000	940	0.006~0.05	18,000	900	0.13~0.4
2010	R0.5	21,000	970	0.005~0.08	14,000	700	0.17~0.5
2012	R0.6	18,000	1,010	0.04 ~0.09	12,000	600	0.2 ~0.6
2014	R0.7	15,000	1,020	0.05 ~0.1	10,000	500	0.23~0.7
2015	R0.75	14,000	1,010	0.06 ~0.12	9,500	480	0.25~0.75
2016	R0.8	13,000	1,010	0.08 ~0.13	9,000	450	0.27~0.8
2018	R0.9	12,000	1,060	0.09 ~0.15	8,000	400	0.3 ~0.9
2020	R1	11,000	1,100	0.03 ~0.21	7,000	350	0.33~1
2030	R1.5	6,900	760	0.03 ~0.23	4,800	240	0.5 ~1.5
2040	R2	5,200	690	0.01 ~0.28	3,600	180	0.6 ~2
2050	R2.5	4,200	590	0.16 ~0.31	2,900	150	0.8 ~2.5
2060	R3	3,500	550	0.22 ~0.36	2,400	120	1 ~3

Slotting



Note:

- Adjust the axial depth (a_p) based on the effective length and milling condition.
- Recommend water soluble coolant for Aluminum Alloys and Copper.
- Recommend air blow for Plastics.
- Remove chips from the work piece to keep the milling surface quality.
- If chips clog on the tool, stop the operation and remove them accordingly.

